





LAS7004 Perfil acústico (34dB) para puertas dobles con cerradura centrada

Perfil de aluminio con goma de doble labio. Cierra la franquicia entre las hojas de una puerta doble a la vez que permite la colocación de una cerradura centrada. Puede recortarse para alojar el frente de la cerradura. Se suministra en barras de 2100 mm color plata o bronce.

Slimline, medium duty perimeter seal designed for timber doors with plain or rebated meeting stiles and where a centre latch is required. The leg of this seal can be cut out to accommodate the latch plate. Easily installed without removing the door.

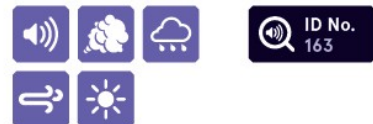

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 34dB).
- ▶ Note: two rows of twin elastomeric fins will provide optimum acoustic performance.

Performance

- ▶ Protects against sound, smoke, weather, draught and light.

Location

- ▶ Meeting stiles of single and double swing doors.
- ▶ Sliding and revolving doors.

Use with

- ▶ Practically any threshold seal.

Seal material

- ▶ Choose from: (i) 4mm projection twin elastomeric fins (ii) 6mm projection twin elastomeric fins.

Standard lengths

- ▶ 1m and 2.1m. Other lengths to special order.

Fixing

- ▶ Wood screws are supplied (self-tapping screws for metal frames are available on request).
- ▶ Fixing holes are predrilled and countersunk.

Finishes

- ▶ Silver anodised aluminium with grey twin seal insert.
- ▶ Bronze anodised aluminium with black twin seal insert.
- ▶ Black and light bronze anodised aluminium (non-standard - charges and lead times apply).
- ▶ Other powder-coated colour finishes (non-standard - charges and lead times apply).